

DATA: 14/09/2022

72S41381006: 4SDPM 1/38C

DATI POMPA E MOTORE




| | | | |
|----------------------|--------|--|---------|
| n (rpm): | 2900 | Fasi motore: | 1~ |
| H max (m): | 234.00 | Un (V): | 230 |
| H min (m): | 52.00 | fn (Hz): | 50 |
| Q min (mc/h): | 0.30 | Poli: | 2 |
| Q max (mc/h): | 1.50 | Max temperatura del liquido (°C): | 35 |
| Pn (kW): | 1.10 | P1 (kW): | 1.71 kW |
| Pn (HP): | 1.50 | Peso (kg): | 20.400 |
| Tipo motore: | IM | | |

MATERIALI

| | | | |
|----------------------------|---|-------------------|---|
| Camicia esterna: | Acciaio inossidabile al Cr-Ni 1.4301 EN 10088 (AISI 304) | Diffusore: | Null |
| Corpo di mandata: | Acciaio inossidabile al Cr-Ni 1.4301 EN 10088 (AISI 304) | Albero: | Acciaio inossidabile al Cr-Ni 1.4301 EN 10088 (AISI 304) |
| Lanterna aspirante: | Acciaio inossidabile al Cr-Ni 1.4301 EN 10088 (AISI 304) | Filtro: | Acciaio inossidabile al Cr-Ni 1.4301 EN 10088 (AISI 304) |
| Corpo stadio: | Acciaio inossidabile al Cr-Ni 1.4301 EN 10088 (AISI 304) | Viti: | Acciaio inossidabile al Cr-Ni 1.4301 EN 10088 (AISI 304) |
| Girante: | Noryl PPO-GF20 | | |

DATA: 14/09/2022

72S41381006: 4SDPM 1/38C

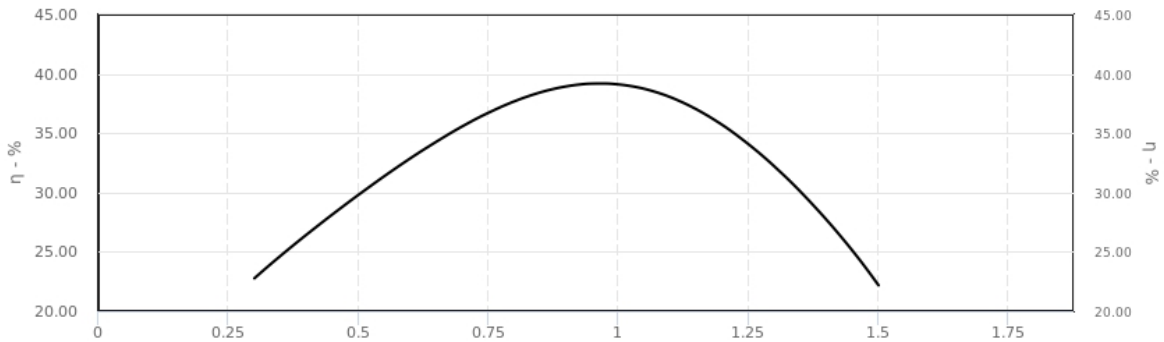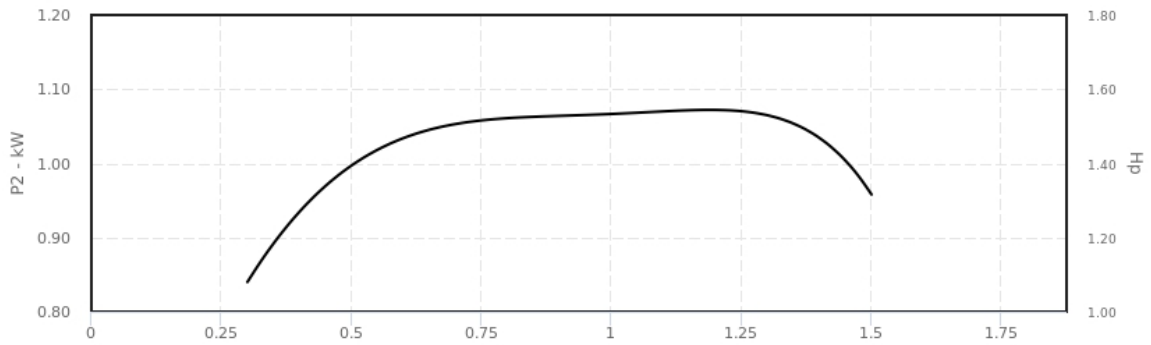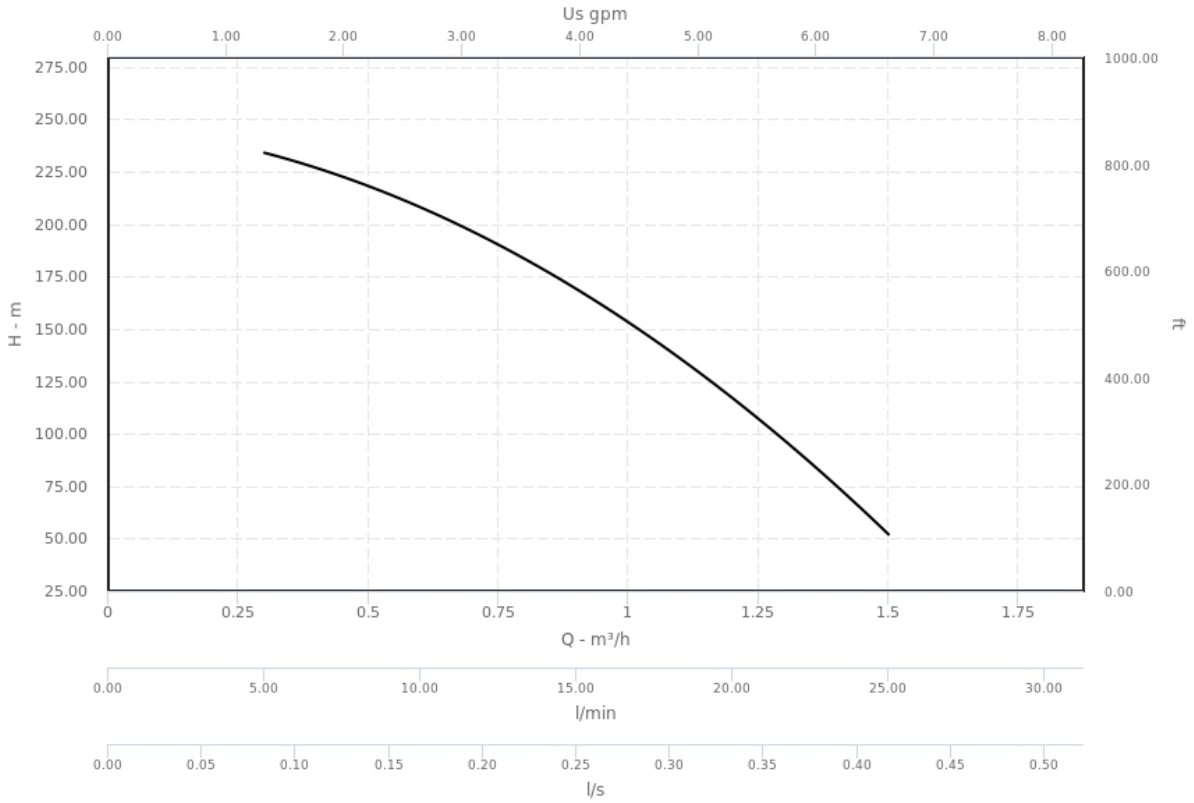

DATA: 14/09/2022

72S41381006: 4SDPM 1/38C

DIMENSIONI (MM)

dn2: Rp 1 1/4"
f: 864.00 mm
fM: 1266.00 mm
I5: 98

